

LASER MFC

FLATBED


MULTI-FUNCTION CENTER

FAX • LASER PRINTER • DIGITAL COPIER • COLOR SCANNER • PC FAX

MFC-9700



Versatile Flatbed Design

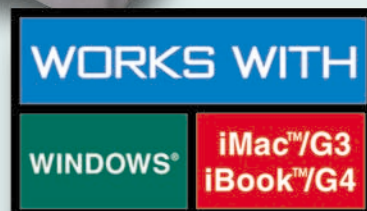

At your side.™

brother®

LASER MFC

FLATBED

MULTI-FUNCTION CENTER

MFC-9700

FAX FEATURES

- 50 Page Auto Document Feeder
- Super Quick Scan – up to 2 seconds per page*
- 14.4K bps High-Speed Fax Modem
- 108 Station Auto Dialing
- 8MB Total Memory (up to 600 pages*)
- Broadcasting (up to 158 locations)
- Dual Access lets you scan a fax into memory while another is being received
- Simultaneous Operations let you perform two functions at once

LASER PRINTER FEATURES

- Up to 15 Pages per Minute Printing
- True 600 x 600 dpi Laser Output
- Parallel and USB Interfaces Standard (Parallel cable included)
- 250 Sheet Paper Cassette Capacity (Optional 2nd 250 Sheet Cassette available†)
- Works with Windows®, DOS, (PCL4) and iMac™/iBook™/G3/G4 applications (see minimum system requirements below)



DIGITAL COPIER FEATURES

- Versatile Flatbed Design for copying from bound documents
- Up to 15 cpm Copy Speed
- 600 dpi Copy Output
- No PC required
- Multi-Copying, up to 99, with Sorting
- Reduce or Enlarge from 25% to 400% in one percent increments

COLOR SCANNER FEATURES

- Flatbed Design for scanning from bound documents
- Color or Black & White Scanning
- Up to 9600 x 9600 dpi (Interpolated) Resolution and up to 600 x 2400 dpi (Optical) Resolution
- Easy to use Desktop interface with "Drag and Drop" Filing and Linking
- Includes award-winning ScanSoft™ PaperPort® and TextBridge® OCR software

PC FAX FEATURES

- Includes Brother PC Fax Software for sending or receiving faxes via your PC
- Broadcast faxes from your PC
- Works with Windows® and iMac™/iBook™/G3/G4

MFC-9700 Optional Supplies & Accessories*

TN-430:	Standard Toner Cartridge 3,000 pages per cartridge†
TN-460:	High Yield Toner Cartridge 6,000 pages per cartridge†
DR-400:	Drum Unit
LT-400:	Second Paper Cassette (Holds an additional 250 Pages)
NC-8100h	Network (LAN) Board

† Requires additional purchase

‡ Based on 5% page coverage

* Based on Brother #1 Chart with MMR coding and standard resolution

Minimum System Requirements

Computer Platform & Operating System Version		Processor Minimum Speed	Minimum RAM	Recommended RAM	Available Hard Disk Space	CD-ROM Drive Minimum Speed
Windows® Operating Systems	95, 98, 98SE	Pentium 75MHz	24MB	32MB	50MB	2X
	Me	Pentium 150MHz	32MB	64MB	50MB	2X
	NT® Workstation 4.0	Pentium 75MHz	32MB	64MB	50MB	2X
	2000 Professional	Pentium 133MHz	64MB	128MB	50MB	2X
	XP	Pentium 233MHz	64MB	128MB	50MB	2X
Apple iMac™/iBook™/G3/G4 Operating Systems	OS 8.5, 8.5.1 (Printer Only)	All base models meet minimum requirements			50MB	2X
	OS 8.6 — 9.1 (Printer & Scanner)				50MB	2X
					50MB	2X

NOTE: USB is not supported under Windows® 95 or Windows NT® 4.0

All registered trademarks referenced herein are the property of their respective companies.



PRODUCT SPECIFICATIONS

Approved: FCC & UL

Unit Dimensions: 19.4" x 18.0" x 16.9"

Carton Dimensions: 23.5" x 22.3" x 22.8"

Unit/Carton Weight: 33.0 lbs/46.3 lbs

UPC Code: 0 12502 60073 2

Printing Method/Speed: Electrophotography/15PPM

Compatibility: ITU Group 3

Coding Method: MH/MR/MMR/JBIG

Modulation: 14400/12000/9600/7200/4800/2400 bps

Transmission Time: 4 seconds per page (ITU #1 chart, JBIG)

Total Machine Memory: 8MB

Document Input Width: 5.8" to 8.5"

Recording Paper Size: 8.5" x 11"/8.5" x 14"

Paper Type for Manual Pass: Letter, Legal, A4, B5, Executive, Envelopes, Transparencies, Laser label sheets, Custom Size 2.75" x 5" to 8.5" x 14"

Scanning & Recording Width: 8.2"

Printer Resolution: True 600 x 600 dpi

Fax Resolution: Standard: 203 x 98 lines/inch

Fine: 203 x 196 lines/inch

Superfine: 203 x 392 lines/inch

Gray Scale: 64 shades

Speaker Type: Monitor

Interfaces (standard): High-Speed Bi-Directional Centronics Parallel (IEEE 1284 cable included) & USB interfaces (USB cable not included)

Emulations: Brother Printing Solution for Windows® or iMac™/iBook™/G3/G4, PCL4

Utility Software: Windows® 95/98/98SE, Me, NT® Workstation 4.0, 2000 Professional, XP, or iMac™/iBook™/G3/G4, OS 8.5-9/1*

Power Supply: 120V, 50/60Hz

Power Consumption: Operating (Copying): 850W or less
Standby: 60W or less
Sleep Mode: 9W or less

Noise Level: 53 dbA (printing)
30 dbA (standby)

Operating Environment: 50° to 90.5° (F)

*OS 8.5, 8.5.1 support printing only

© 2001 BROTHER INTERNATIONAL CORPORATION

100 Somerset Corporate Blvd., Bridgewater, NJ 08807-0911

For more information please call the Brother Fax-Back System at 1-800-521-2846 (USA), 1-800-681-9838 (Canada), or visit our web site at www.brother.com

All specifications are subject to change without notice. Printed in USA. CATMFC9700

At your side.™
brother®
www.brother.com