

# Driver Installation Guide


## Macintosh® For Network Users

- Before you continue, please ensure that the administrator has configured the network printer settings correctly.
- Follow the instructions in this guide for your operating system.
- Some illustrations are based on the HL-2600CN series.

**Steps 1 to 5** Follow these steps in the **Quick Setup Guide** first.

### For Mac OS 8.6 to 9.2 Users Only


#### Step 6 Connect the Printer to Your Macintosh & Install the BR-Script PPD File

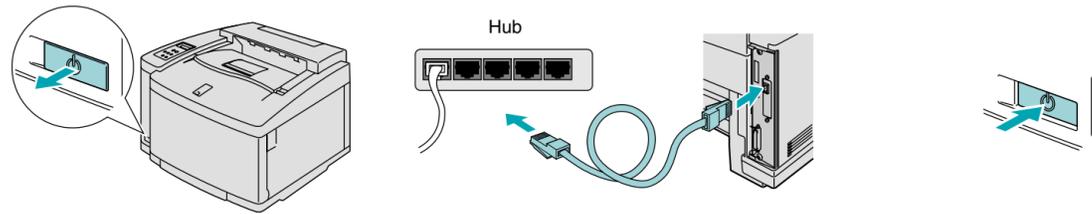

- 1 Turn off the printer power button.
- 2 Connect the network cable to your printer, and then connect it to a free port on your hub.
- 3 Turn on the printer power button.



- 4 Insert the CD-ROM into your CD-ROM drive.
- 5 Double-click the Start Here! icon. Follow the instructions on the screen.
- 6 Click the Install Software icon on the Menu screen.
- 7 Follow the instructions on the screen.

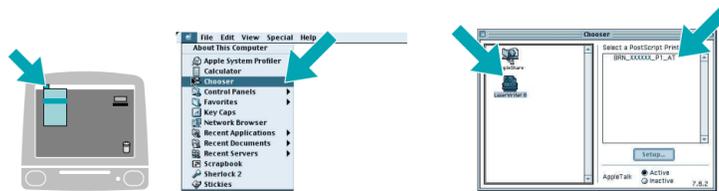


- 8 Open the Chooser from the Apple menu.
- 9 Click the LaserWriter8 \*1 icon, and then select BRN\_XXXXX\_P1\_AT.\*2. Close the Chooser.

The Setup is now complete.


\*1 If the Apple LaserWriter8 Driver is not already installed on your system, you can download it from <http://www.apple.com>  
 \*2 xxxxxx are the last six digits of the Ethernet address. For more information, see Chapter 7 of the Network User's Guide.

### For Mac OS X Users Only

#### Step 6 Connect the Printer to Your Macintosh & Install the BR-Script PPD File

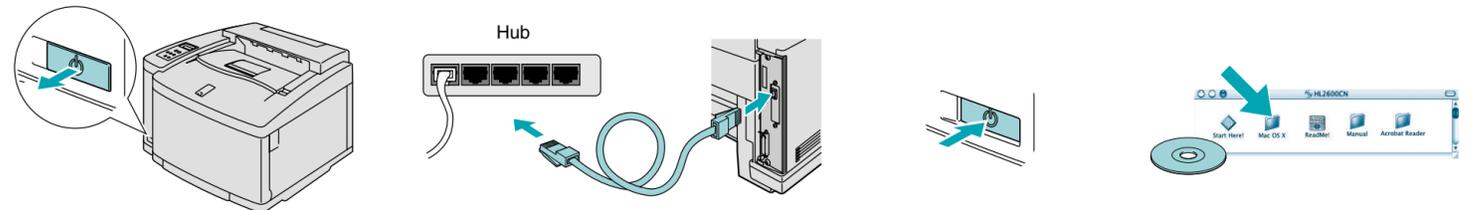

- 1 Turn off the printer power button.
- 2 Connect the network cable to your printer, and then connect it to a free port on your hub.
- 3 Turn on the printer power button.
- 4 Insert the CD-ROM into the CD-ROM drive. Open the Mac OS X folder.

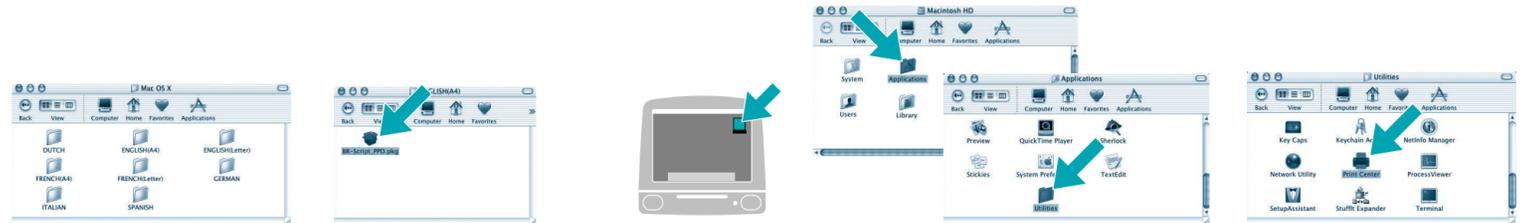

- 5 Open your language folder.
- 6 Double-click the Install icon. Follow the instructions on the screen.
- 7 Open the Macintosh HD icon.
- 8 Open the Applications folder. Open the Utilities folder.
- 9 Open the Print Center icon.



- 10 Click the Add Printer button.
- 11 Select AppleTalk.
- 12 Select BRN\_XXXXX\_P1\_AT.\*3, and then click the Add button.
- 13 Select Quit Print Center from the Print Center menu. The setup is now complete.

\*3 xxxxxx are the last six digits of the Ethernet address. For more information, see Chapter 7 of the Network User's Guide.

### Control Panel



#### LEDs

Power (Green)	Lights when the printer power is on.
Ready (Green)	Lights when the printer is ready to print or is printing.
Data (Orange)	Lights when data remains in the printer buffer. Blinks when the printer is receiving or processing the data.
Alarm (Red)	Lights when the printer has a problem (Operator Call, Error, Service Error) and suspends printing.

#### Buttons

Go	Exit from the control panel menu, Reprint settings or clear error messages. Pause / Continue printing.
Job Cancel	Stop and cancel the printer operation in progress.
Secure Print	Print secure documents.
Reprint	Select the Reprint menu.
Menu	+ Move forward through menus.
	- Move backward through menus.
	Set Select the control panel menu. Set the selected menus and settings.
Back	Go back one level in the menu structure.

#### Language Setting (Default is English)

1. Select the **SETUP** mode by pressing the **+** button, and then press the **Set** button.
2. Check that the **LANGUAGE** message appears, and then press the **Set** button.
3. Choose your language by pressing the **+** or **-** button, and then press the **Set** button. An asterisk mark (\*) appears at the end of the display. (You can return to the **READY** status by pressing the **Go** button.)

- Note**
1. A real-time clock is built into this printer. Set the time referring to Chapter 4 of the User's Guide on the CD-ROM. You need to set the time before you can use the log management and Reprint functions.
  2. Please enhance the RAMDISK size when you want to use the Reprint functions without the optional HDD or CompactFlash. See RAM expansion. In the HL-2600CN User's Guide (Chapter 5) or in the HL-3450CN User's Guide (Chapter 6).

For more information, see "CONTROL PANEL OPERATION" in Chapter 4 of the User's Guide on the supplied CD-ROM.

# Driver Installation Guide

## Macintosh® For USB Users

- Follow the instructions in this guide for your operating system.
- Some illustrations are based on the HL-2600CN series.

Steps 1 to 5 Follow these steps in the **Quick Setup Guide** first.

### For Mac OS 8.6 to 9.2 Users Only

#### Step 6 Connect the Printer to Your Macintosh & Install the Driver

- 1 Make sure the printer power button is on.
- 2 Connect the USB interface cable to your Macintosh, and then connect it to your printer.
- 3 Insert the CD-ROM into your CD-ROM drive.
- 4 Double-click the Start Here! icon. Follow the instructions on the screen.
- 5 Click the Install Software icon on the Menu screen.
- 6 Follow the instructions on the screen.

- The illustrations are based on Mac OS 9.04.
- 7 Open the Macintosh HD icon.
  - 8 **For Mac OS 8.6 to 9.04 Users:** Open the Apple Extras folder. Open the Apple LaserWriter Software folder.  
**For Mac OS 9.1 to 9.2 Users:** Open the Applications (Mac OS 9) folder. Open the Utilities folder.
  - 9 Open the Desktop Printer Utility icon.
  - 10 Select Printer (USB), and then click the OK button.
  - 11 Click the Change... button in PostScript™ Printer Description (PPD) file. Select Brother HL-2600CN BR-Script3 or HL-3450CN BR-Script3, and then click the Select button.

- 12 Click the Change... button in USB Printer Selection. Select HL-2600CN series or HL-3450CN series, and then click the OK button.
- 13 Click the Create... button.
- 14 Enter your printer name (HL-2600CN or HL-3450CN), and then click the Save button.
- 15 Select Quit from the File menu.

#### Step 7 Setting Your Printer as the Default Printer

- 1 Click the HL-2600CN series or HL-3450CN series icon on the Desktop.
  - 2 Select Set Default Printer from the Printing menu.
- The setup is now complete.

### For Mac OS X Users Only

#### Step 6 Connect the Printer to Your Macintosh & Install the Driver

- 1 Make sure the printer power button is on.
- 2 Connect the USB interface cable to your Macintosh, and then connect it to your printer.
- 3 Insert the CD-ROM into your CD-ROM drive. Open the Mac OS X folder.

- 4 Open your language folder.
- 5 Double-click the Install icon. Follow the instructions on the screen.
- 6 Open the Macintosh HD icon.

- 7 Open the Applications folder. Open the Utilities folder.
- 8 Open the Print Center icon.

- 9 Click the Add Printer... button.
- 10 Select USB.
- 11 Select HL-2600CN series or HL-3450CN series, and then click the Add button.

- 12 Select Quit Print Center from the Print Center menu.
- The setup is now complete.