

STANDARD MODEL LINEUP

G3 (Parallel Shaft) Standard Model Lineup

Motor Power	Frame No.	Reduction Ratio							
3-Phase 0.1kW	18	1/5	1/10	1/15	1/20	1/25	1/30	1/40	1/50
	22	1/60	1/80	1/100	1/120	1/160	1/200		
	28	1/300	1/375	1/450					
	32	1/600	1/750	1/900	1/1200				
3-Phase 0.2kW	18	1/5	1/10	1/15	1/20	1/25			
	22	1/30	1/40	1/50	1/60	1/80	1/100		
	28	1/100	1/120	1/160	1/200				
	32	1/300	1/375	1/450					
	40	1/600	1/750	1/900	1/1200				
3-Phase 0.4kW	22	1/5	1/10	1/15	1/20	1/25			
	28	1/30	1/40	1/50	1/60	1/80	1/100		
	32	1/100	1/120	1/160	1/200				
	40	1/300	1/375	1/450					
	50	1/600	1/750	1/900	1/1200				
3-Phase 0.75kW	28	1/5	1/10	1/15	1/20	1/25			
	32	1/30	1/40	1/50	1/60	1/80	1/100		
	40	1/100	1/120	1/160	1/200				
	50	1/300	1/375	1/450					
3-Phase 1.5kW	32	1/5	1/10	1/15	1/20	1/25			
	40	1/30	1/40	1/50	1/60	1/80	1/100		
	50	1/100	1/120	1/160	1/200				
3-Phase 2.2kW	40	1/5	1/10	1/15	1/20	1/25			
	50	1/30	1/40	1/50	1/60	1/80	1/100		


(Note) 1. G3 (Parallel shaft) Gearmotors have both foot and flange mounts. Please note that small flange mounts (G3K) are limited to frames 18-32 while regular flange mounts (G3F) are limited to 40 and 50 frames).

2. 1.5kW and 2.2kW IP65 models cannot be provided with a brake.

3. Models shown in are limited torque type. Be sure to refer to the allowable torque in the Performance Table.

STANDARD MODEL LINEUP


H2 (Right Angle Shaft) Standard Model Lineup

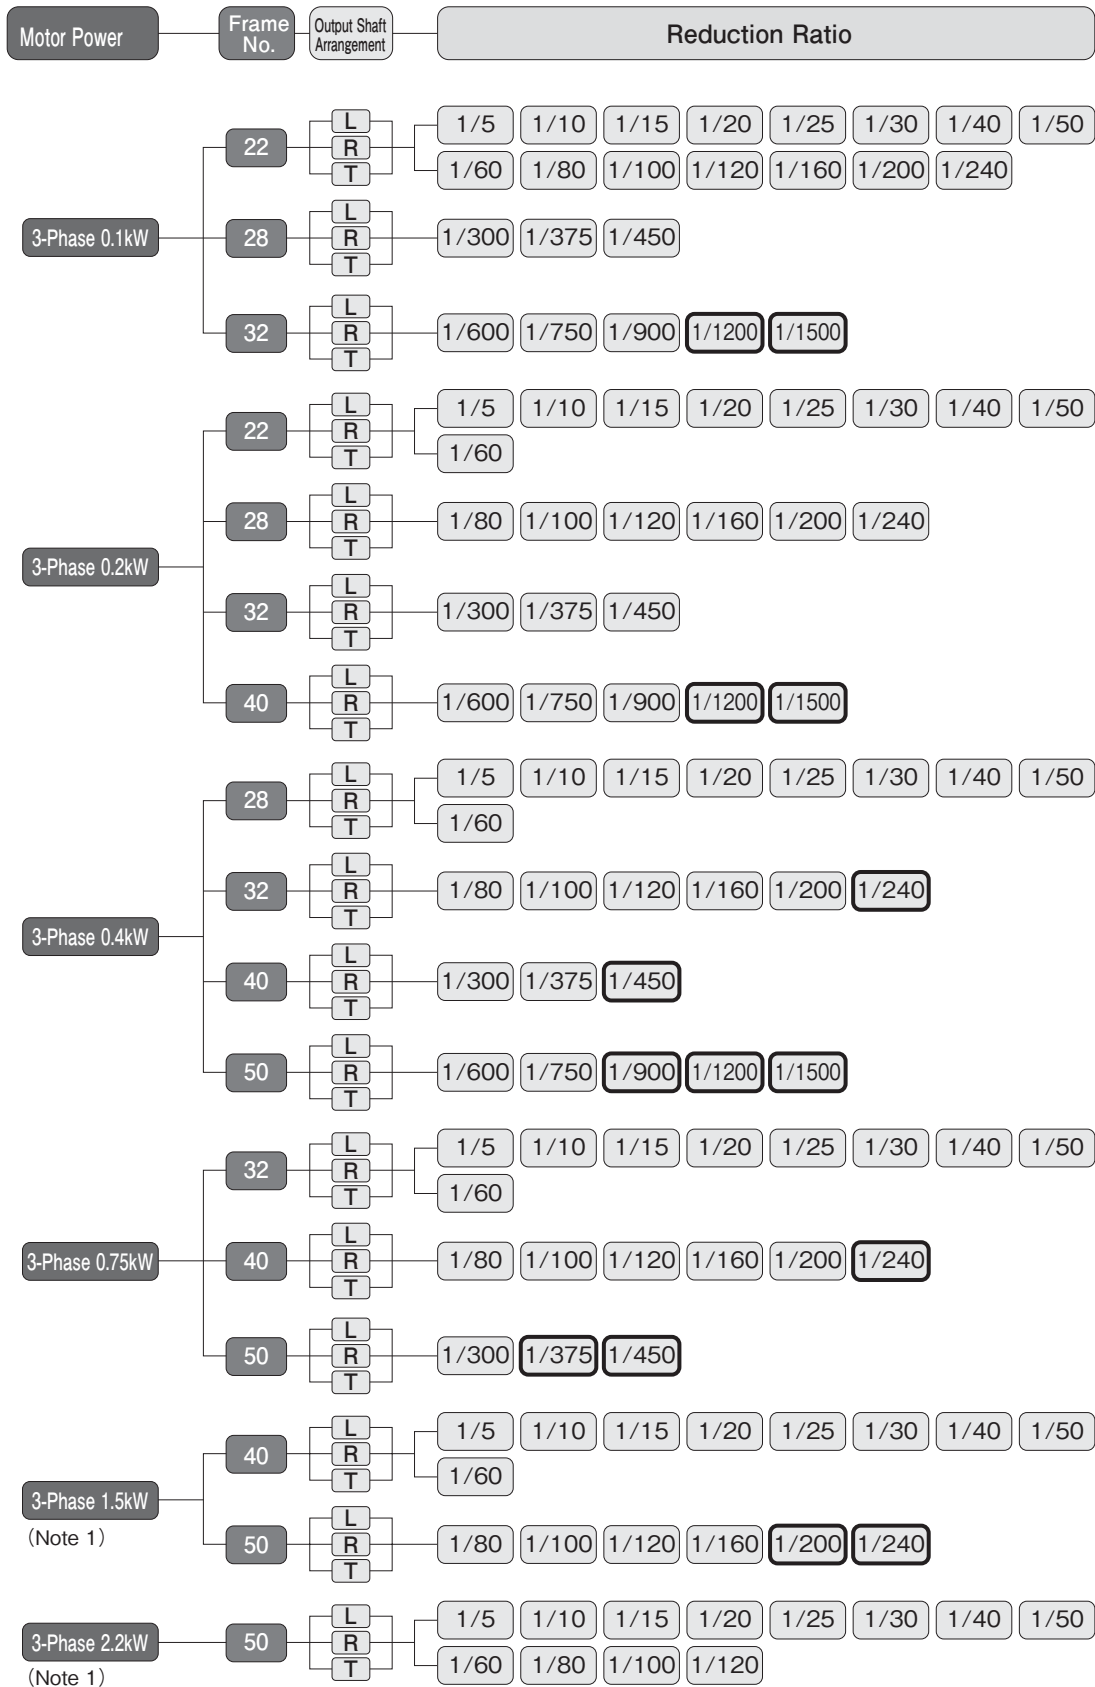

(Notes) 1. 1.5kW and 2.2kW IP65 models cannot be provided with a brake.
 2. Models shown in are limited torque type. Be sure to refer to the allowable torque in the Performance Table.

STANDARD MODEL LINEUP

F3S (Right Angle Hollow Bore) Standard Model Lineup

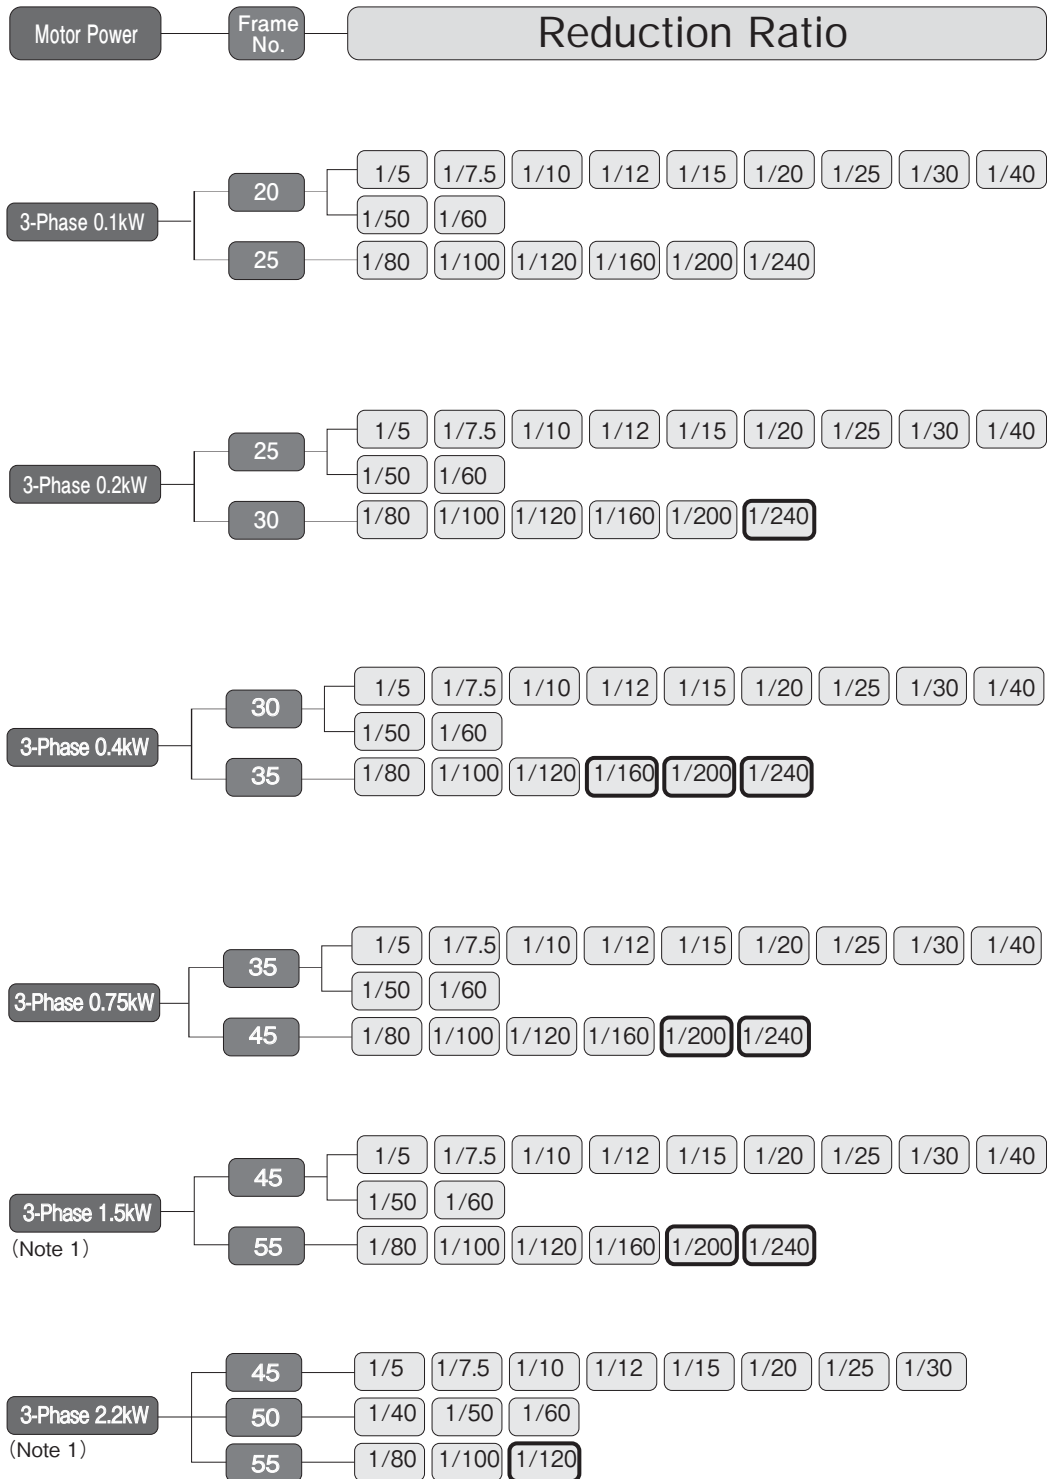

(Notes) 1. 1.5kW and 2.2kW IP65 models cannot be provided with a brake.

2. Models shown in are limited torque type. Be sure to refer to the allowable torque in the Performance Table.