



- (3) Remove Back Cover.
Unscrew 15 screws of Back Cover.

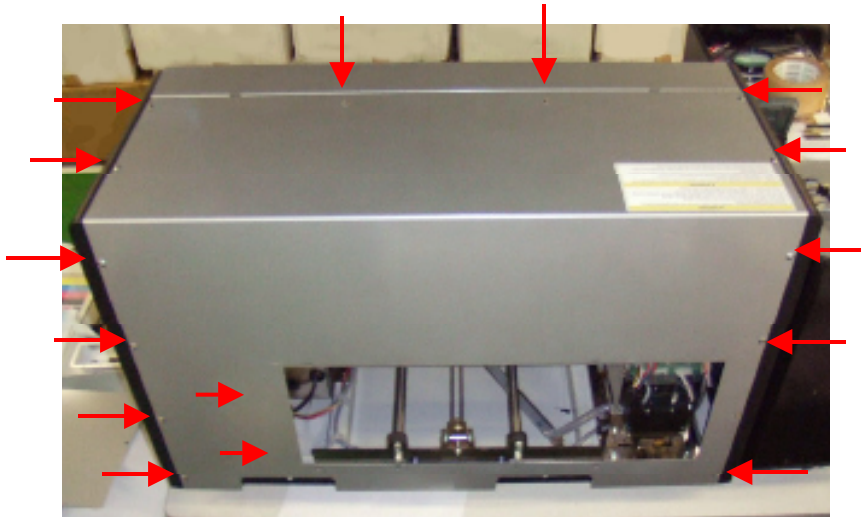

Unscrew 1 screw pan at the body edge of Ground Wire: 220.

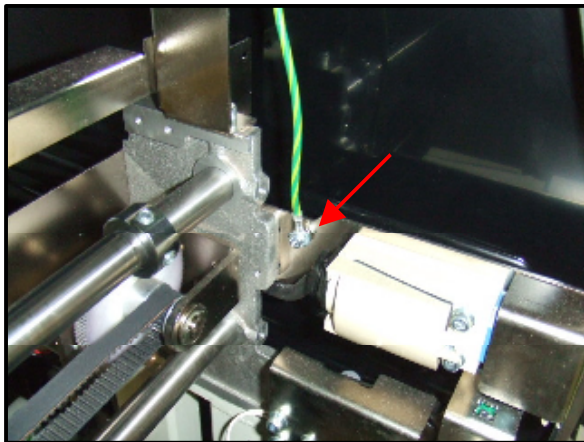

Open Front Cover and raise Rear Cover from the bottom.

