


Block 17 Instructions

Designed and Digitized by Anna Aldmon©

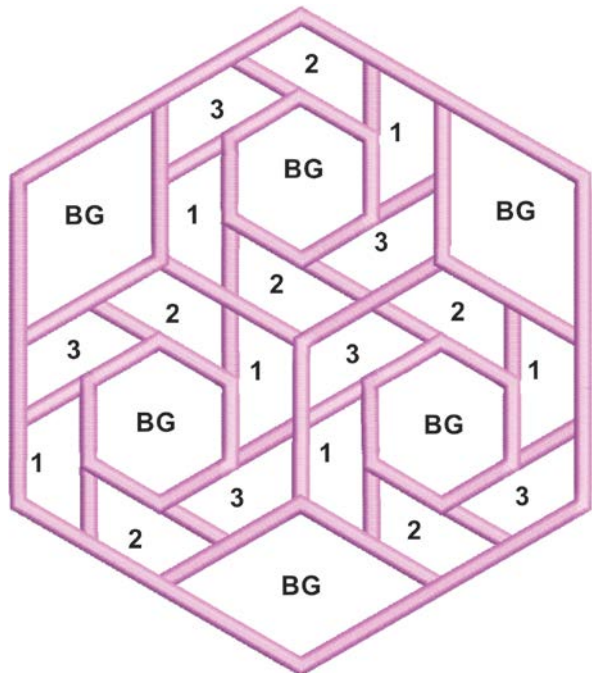

Applique Fabric Requirements	
Size of Appliqué Fabric	Appliqué Shape #
(3) 3" x 3 ½"	BG – Lg Diamond
6" x 6"	BG – Sm Hexagon
(6) 2" x 3"	1 – Sm Half Hexagon
(6) 2" x 3"	2 – Sm Half Hexagon
(6) 2" x 3"	3 – Sm Half Hexagon

- 1) Hoop with medium tear away stabilizer.
- 2) Load design: **Block 17**
- 3) Center 13" x 13" background fabric on top of stabilizer.
- 4) Attach hoop to embroidery unit.
- 5) Use the basting function of the embroidery machine to attached the background fabric to the stabilizer.

Stitch Order Block 17		
Step #'s	Appliqué Shape #'s	General Instructions
1 – Placement 2 – Tack Down	BG Sm Hexagon	TRIM applique fabric after Tack Down Stitch.
3 – Placement 4 – 6 – Tack Down	BG Lg Diamond	TRIM applique fabric after Tack Down Stitch.
7 – Placement 8 - 13 – Tack Down	1	TRIM applique fabric after Tack Down Stitch.
14 – Placement 15 - 20 – Tack Down	2	TRIM applique fabric after Tack Down Stitch.
21 – Placement 22 - 27 – Tack Down	3	TRIM applique fabric after Tack Down Stitch.
28 – Cover Stitch		Change thread for the cover stitch. The cover stitch is a satin stitch that will secure all the edges of the applique fabric.

Remove hoop from Embroidery unit.

Turn hoop over and remove tear away stabilizer starting from the center and move out to the edge of the design. Trim the basting stitches and gently remove excess tear away stabilizer.

Press block from backside and trim to 10 ½" x 10 ½"