


## Block 18 Instructions

Designed and Digitized by Anna Aldmon©

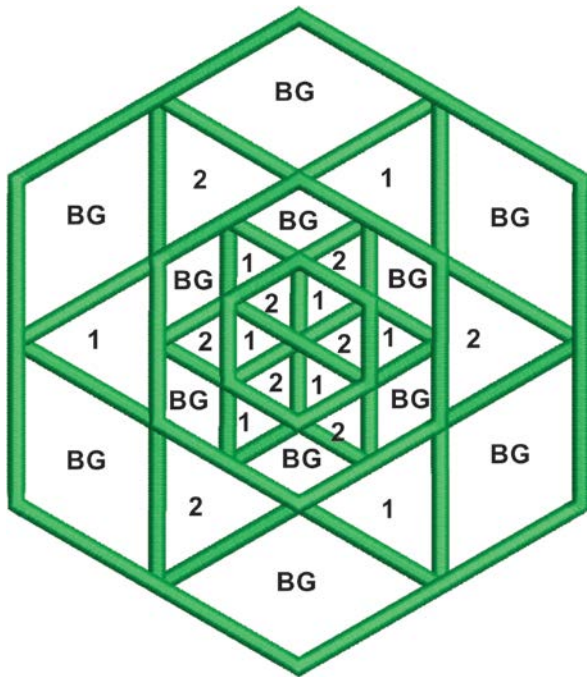

Applique Fabric Requirements	
Size of Applique Fabric	Applique Shape #
(6) 3" x 4 1/2" 5" x 5"	BG – Lg Diamond BG – Sm Diamond
(3) 3" x 3" 2" x 2 1/2" 4" x 3 1/2"	1 – Lg Triangle 1 – Sm Triangle
(3) 3" x 3" 2" x 2 1/2" 4" x 3 1/2"	2 – Lg Triangle 2 – Sm Triangle

- 1) Hoop with medium tear away stabilizer.
- 2) Load design: **Block 18**
- 3) Center 13" x 13" background fabric on top of stabilizer.
- 4) Attach hoop to embroidery unit.
- 5) Use the basting function of the embroidery machine to attached the background fabric to the stabilizer.

Stitch Order Block 18		
Step #'s	Applique Shape #'s	General Instructions
1 – Placement 2 - 7 – Tack Down	BG Lg Diamond	<b>TRIM</b> applique fabric after Tack Down Stitch.
8 – Placement 9 – Tack Down	BG Sm Diamond	<b>TRIM</b> applique fabric after Tack Down Stitch.
10 – Placement 11 - 15 – Tack Down	1	<b>TRIM</b> applique fabric after Tack Down Stitch.
16 – Placement 17 - 21 – Tack Down	2	<b>TRIM</b> applique fabric after Tack Down Stitch.
22 – Cover Stitch		Change thread for the cover stitch. The cover stitch is a satin stitch that will secure all the edges of the applique fabric.

Remove hoop from Embroidery unit.

Turn hoop over and remove tear away stabilizer starting from the center and move out to the edge of the design.

Trim the basting stitches and gently remove excess tear away stabilizer.

Press block from backside and trim to 10 1/2" x 10 1/2"