

Driver Installation Guide

Macintosh® For Network Users


- Before you continue, please make sure that the administrator has configured the network printer settings correctly by referring to the **Network Quick Setup Guide**.
- Follow the instructions in this guide for your operating system.

Steps 1 to 4 Follow these steps in the Quick Setup Guide first.

LM0110001 Printed in Japan

For Mac OS 8.6 to 9.2 Users Only


Step 5 Connect the Printer to Your Network and Install the Adobe PostScript3 PPD File and AdobePS Driver

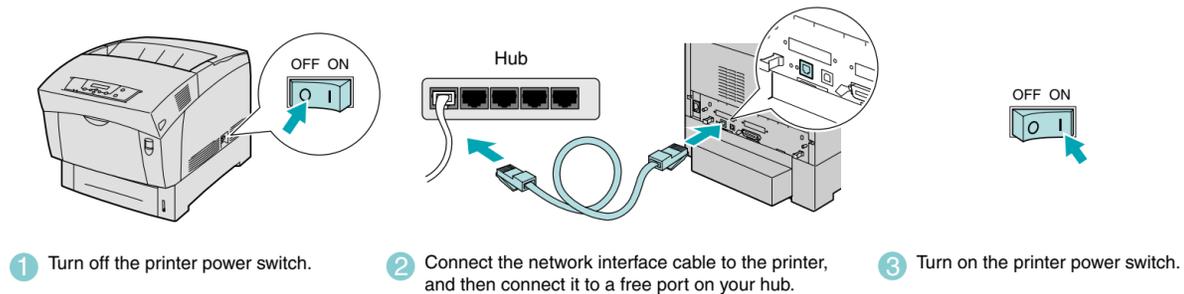

- 1 Turn off the printer power switch.
- 2 Connect the network interface cable to the printer, and then connect it to a free port on your hub.
- 3 Turn on the printer power switch.



- 4 Insert the CD-ROM into your CD-ROM drive.
- 5 Double-click the Start Here! icon. Follow the instructions on the screen.
- 6 Click the Install Software icon on the Menu screen.
- 7 Follow the instructions on the screen.

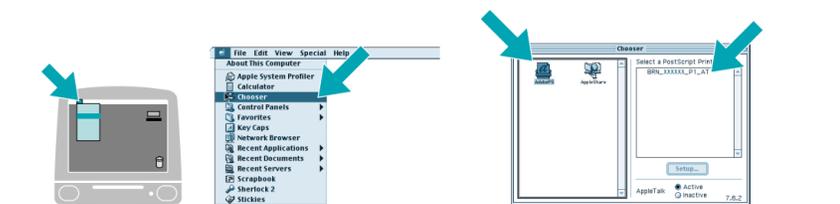


- 8 Open the Chooser from the Apple menu.
- 9 Click the AdobePS icon, and then select BRN_xxxxxx_P1_AT.*1. Close the Chooser.

The Setup is now complete.


*1 xxxxxx are the last six digits of the Ethernet address. For more information, see Chapter 7 of the Network User's Guide.

For Mac OS X 10.1 Users Only


Step 5 Connect the Printer to Your Network and Install the Adobe PostScript3 PPD File

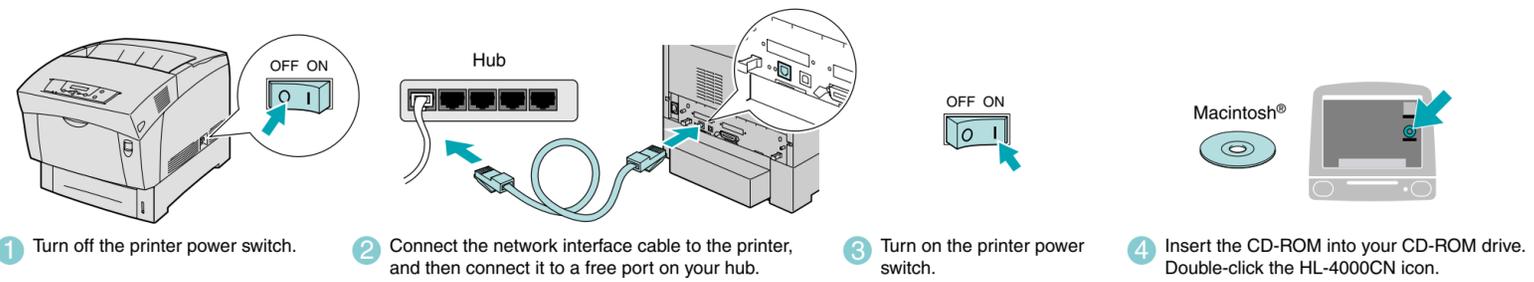

- 1 Turn off the printer power switch.
- 2 Connect the network interface cable to the printer, and then connect it to a free port on your hub.
- 3 Turn on the printer power switch.
- 4 Insert the CD-ROM into your CD-ROM drive. Double-click the HL-4000CN icon.

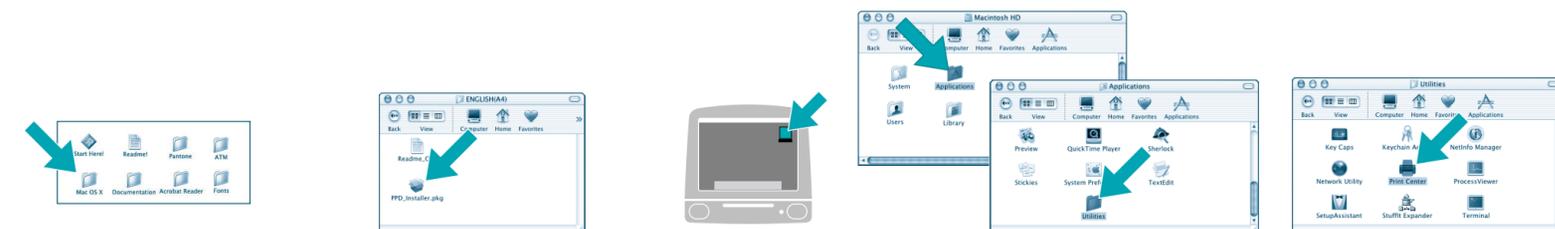


- 5 Open the Mac OS X folder.
- 6 Double-click the PPD_Installer.pkg icon. Follow the instructions on the screen.
- 7 Open the Macintosh HD icon.
- 8 Open the Applications folder. Open the Utilities folder.
- 9 Open the Print Center icon.

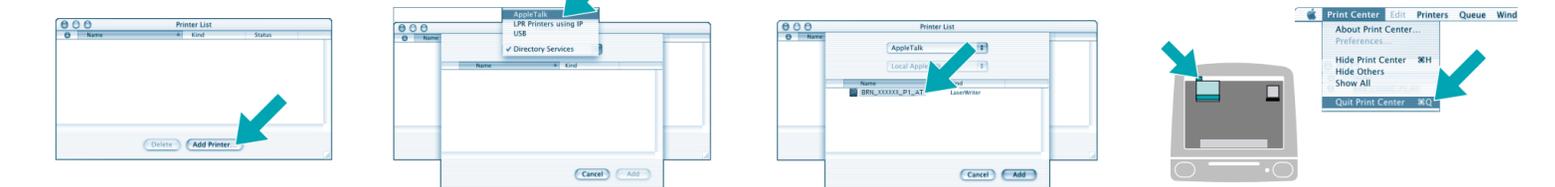

- 10 Click the Add Printer button.
- 11 Select AppleTalk.
- 12 Select BRN_xxxxxx_P1_AT*2, and then click the Add button.
- 13 Select Quit Print Center from the Print Center menu. The setup is now complete.

*2 xxxxxx are the last six digits of the Ethernet address. For more information, see Chapter 7 of the Network User's Guide.

Control Panel

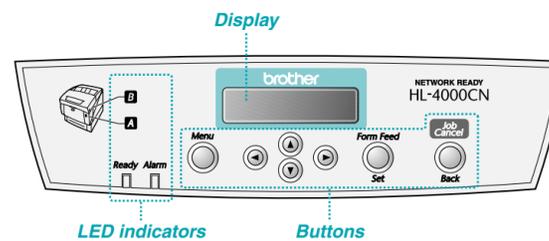

Language Setting (Default is English):

When you want to change the language of the control panel message, refer to "Setting Your Language on the Control Panel" in the Network Quick Setup Guide (the reverse side of the Quick Setup Guide).

For more information, see "CONTROL PANEL" in chapter 5 of the User's Guide on the supplied CD-ROM.

LEDs		
Ready (Green)	Lights when the printer is ready to print.	
	Blinks when the printer is receiving data.	
Alarm (Red)	Lights when the printer has a problem.	
	Blinks when the printer has a problem that the user cannot rectify. Contact your dealer or Brother authorized service representative.	
A B	Lights when the printer has paper jams. Open the front cover with the indicated button to clear the jammed paper.	
Buttons		
	Print screen mode	Menu screen mode
Menu	Go back to the menu screen mode.	Close the menu screen mode and switch to the print screen mode.
▲ ▼	N/A	Scroll through menus and menu items.
◀ ▶	N/A	◀ Moves the displayed menu one level down. ▶ Moves the displayed menu one level up.
Form Feed / Set	Force the remaining print data to be output.	Select menus and menu items. Moves the displayed menu one level down. Sets the displayed parameter.
Job Cancel / Back	Cancel printing.	Moves the displayed menu one level up.

Driver Installation Guide

Macintosh® For USB Users

■ Follow the instructions in this guide for your operating system.

Steps 1 to 4 Follow these steps in the **Quick Setup Guide** first.

For Mac® OS 8.6 to 9.2 Users Only

Step 5 Set the Adobe Protocol

Note: To change the language of the control panel messages, see "Setting Your Language on the Control Panel" in the Network Quick Setup Guide (the reverse side of the Quick Setup Guide).



- Press **Menu**.
- Press **Menu** 5 times.
- Press **Form Feed Set**.
- Press **Adobe Protocol RAW**.

3 seconds later, an asterisk (*) appears.



Turn the printer off.
Turn the printer back on.

Step 6 Connect the Printer to Your Macintosh® and Install the Adobe PostScript3 PPD File and AdobePS Driver

- Connect the USB interface cable to your Macintosh®, and then connect it to the printer.
- Insert the CD-ROM into your CD-ROM drive.
- Double-click the Start Here! icon. Follow the instructions on the screen.
- Click the Install Software icon on the Menu screen.
- Follow the instructions on the screen.
- Open the Macintosh HD icon.
- Open the AdobePS Components folder.
- Open the Desktop Printer Utility icon.
- Select **Printer (USB)**, and then click the OK button.
- Click the Change... button in PostScript™ Printer Description (PPD) file. Select **Brother HL-4000CN**, and then click the Select button.
- Click the Change... button in USB Printer Selection. Select **HL-4000CN**, and then click the OK button.
- Click the Create... button.
- Enter your printer name (**HL-4000CN**), and then click the Save button.
- Select **Quit** from the File menu.

Step 7 Setting Your Printer as the Default Printer

- Click the HL-4000CN icon on the Desktop.
- Select **Set Default Printer** from the Printing menu.

The setup is now complete.

For Mac® OS X 10.1 Users Only

Step 5 Connect the Printer to Your Macintosh® and Install the Adobe PostScript3 PPD File

- Make sure the printer power switch is on.
- Connect the USB interface cable to your Macintosh®, and then connect it to the printer.
- Insert the CD-ROM into your CD-ROM drive. Double-click the HL-4000CN icon.
- Open the Mac OS X folder.
- Double-click the PPD_Installer.pkg icon. Follow the instructions on the screen.
- Open the Macintosh HD icon.
- Open the Applications folder. Open the Utilities folder.
- Open the Print Center icon.
- Click the Add Printer button.
- Select **USB**.
- Select **HL-4000CN**.
- Select **HL-4000CN** from the Printer Model pop-up menu.
- Click the Add button.
- Select **Quit Print Center** from the Print Center menu. The setup is now complete.