

Setting Up the machine and PC to Work Together

Before You begin

- Please see the README.WRI file in the root directory of the CD-ROM for the latest important installation and troubleshooting information.
- If you have any problems with this installation, visit us at <http://solutions.brother.com> and view the FAQ's for your machine.
- Please purchase the appropriate interface cable you intend to use with this machine (parallel or USB).
- Some illustrations are based on the MFC-8500.

 Use only a shielded parallel interface cable that is IEEE 1284-compliant and/or a USB cable that is no longer than 6 feet long (1.8 meters).

You must set up the hardware and install the driver before you can use your machine as a printer and scanner with your applications.

Step 1. Shut down and turn OFF your computer.

Step 2. Unplug the FAX/MFC machine from the AC outlet and disconnect the interface cable if you have already connected it.

Step 3. Turn on your computer.

Note: If the "Found New Hardware Wizard" appears before the installation of the software, you should click on Cancel to exit the Wizard, and then start the installation program from the CD-ROM.


Step 4.  Insert the CD-ROM into the CD-ROM drive. If the model name screen appears, click on your model name. The CD-ROM main menu will appear. If the CD-ROM does NOT start automatically, start the installer application by clicking Start, Run, then type x:\setup.exe (where x:\ is the drive letter of your CD-ROM drive).




1. Click Install Software.



2. Click Multi-Function Link® Pro Suite in Main Application. *1

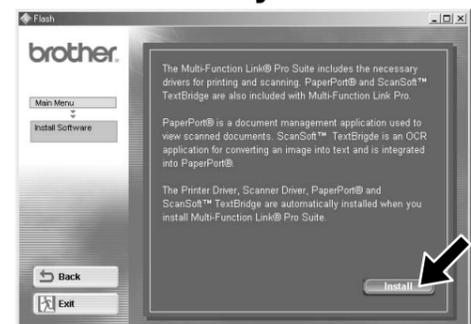


3. Click Install.



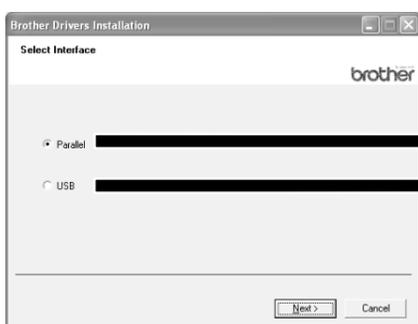


4. Select an interface cable, and then press Next.



For Parallel



For USB

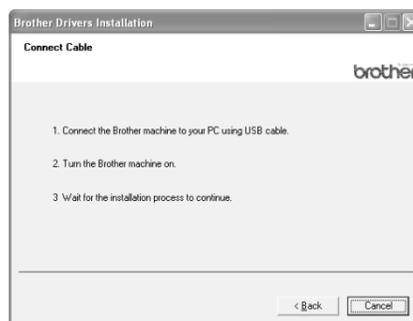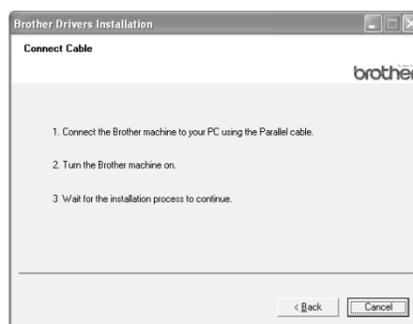

Step 5. Connect the machine to your PC using the parallel or USB cable.

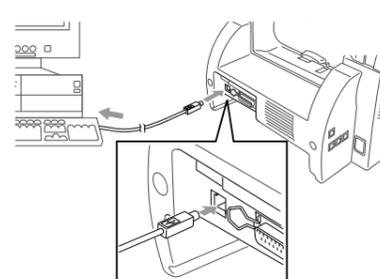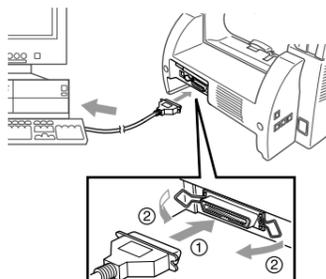

Please see STEP 6

*1 Multi-Function Link® Pro Suite includes Printer Driver, Scanner Driver, PC-FAX software and Remote Setup.
Scanner resolution: Up to 600 dpi
Paper size: 8.5" (215.9 mm) × 11.7" (297 mm)