

Cleaning the Carriage Rail


1. Open the printer.
2. Unscrew the knob on the felt supports and remove them.




3. Remove and replace the felts on the bottom of the felt supports in accordance with the "Maintenance Parts Exchange".



4. Take an isopropyl swab or cloth (95% or higher) and clean the rail thoroughly.

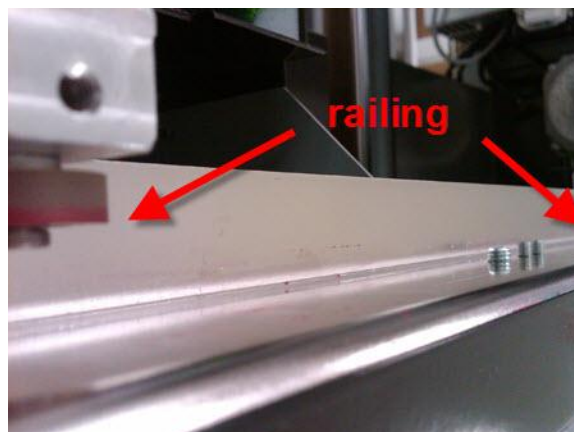

5. Reattach both felt supports and tighten the knob screw.

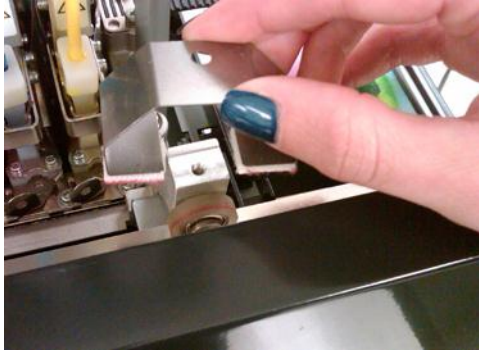

Your dealer(s)-distributor(s) are your first line of support, please contact them for prompt assistance. If you do not have a dealer(s)-distributor(s) refer to our website <http://www.brother-usa.com>. For additional information contact Technical Support at 1-877-427-6843 or tsupport@brother.com. Any information within this document is subject to change.
